

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 9 TWN. 16_N RNG. 5_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 5-15-09
Party Chief: Greene
Crew: Taylor
Type of Marker: Harrison
Method of Establishment: County: 9-23-1996
IN S.P.C. E Zone, NAD 83
Name: 16050901
N: 511 545.678 0(m)
E: 72 199.436 0(m)

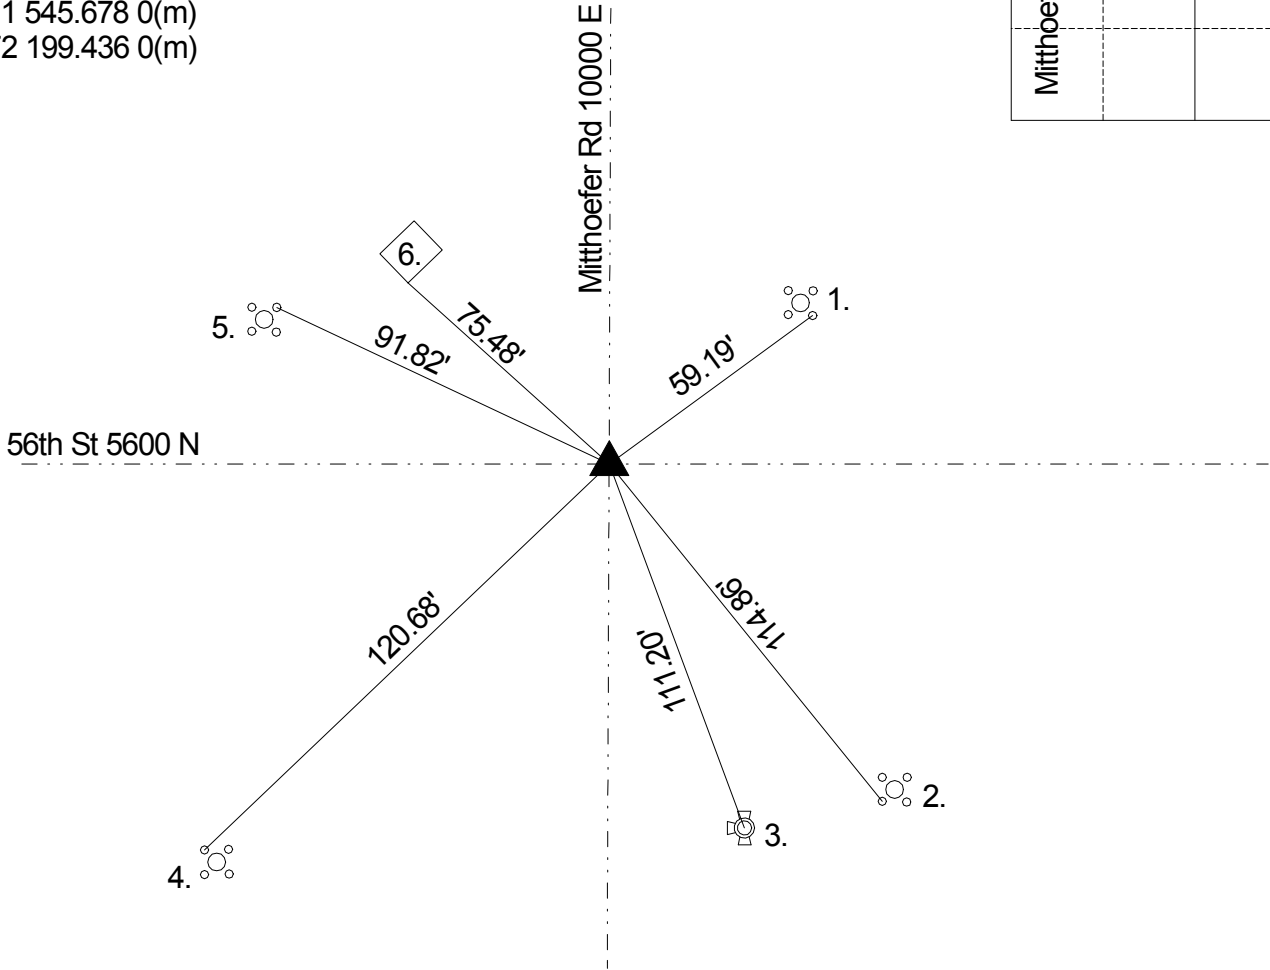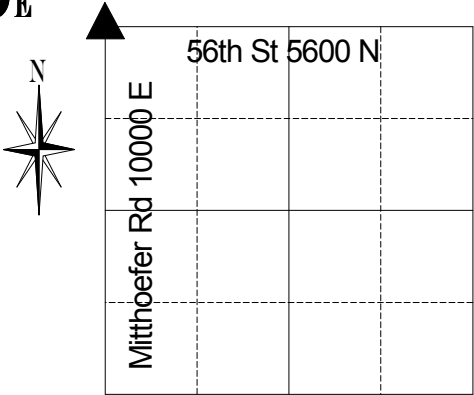

Original post set 1868 by Hosbrook with witnesses: 13" oak N 67 E 24 links; 20" poplar N 43 E 31 links. 8-10-1943 called stone. 7-9-56 Monroe called same. 8-14-63 Burres called same. 3-7-75 Fortner called RR spike over stone. 3-5-80 Wilcoxon called same. 3-5-88 Gries set RR spike over RR spike. 5-14-90 Wilcoxon excavated and found RR spike at surface, RR spike 5" down, and stone 13" down. Stone was .25' N and .03' E of RR spike. Harrison set. Retied 9-23-96 by Wilcoxon. Retied 6-27-2002 by Wilcoxon. Retied 5-15-09 by Greene.

REF.	DISTANCE	DESCRIPTION
1.	59.19'	SE corner bolt of signal pole base
2.	114.86'	SW corner bolt of signal pole base
3.	111.20'	Top nut of fire hydrant
4.	120.68'	NW corner bolt of signal pole base
5.	91.82'	NE corner bolt of signal pole base
6.	75.48'	Southerly corner of control box base